

**10 YR**  
WARRANTY



EMI Compliance:  
FCC Part 15 Class A

Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_



## Airflex C

### High Bay

Commercial and industrial LED high bay. Suspended mounting. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy Sensor, Bi-Level Dimming and 10kV Surge protection available options. Dry and damp rated. DLC and cULus listed. 10 Year Warranty.

### Ordering Options

MODEL	LENGTH	WATTS: 2ft	WATTS: 4ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Airflex	2	80c	80c	3K 3000K	U 120/277V	NL No Lens (standard)	WH White	V V Clips
		95c	110c	35K 3500K	H 347/480V	FR Frosted		AC Aircraft Cable
	4	110c	135c	4K 4000K				
		135c	160c	5K 5000K				
		160c	190c					
		190c	240c					
			320c					
			400c					
			480c					
			600c					

AIRFLEX

WIRING	ACCESSORIES	REFLECTOR	AISLE OPTICS	PLUG OPTIONS
<b>BFC</b> Black Flexible Cord <b>WFC</b> White Flexible Cord	<b>N</b> None <b>OCC</b> Occupancy Sensor (on/off) <b>BLD</b> Bi-Level Dimming (100%/10%) <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery	<b>N</b> None <b>60AF</b> 60 Deg. Aisle Reflector	<b>N</b> None <b>AISLE OPTICS</b>	<b>N</b> None <b>*See Plug Options</b>

**SAMPLE:** Airflex - 2- 80c - 4K - U - FR - WH - AC - BFC - N - N - N - N

#### PLUG OPTIONS

- |   |  |   |
|---|--|---|
| <b>5-15P</b> - 125V 15A T-Slot Plug             | <b>6-20P</b> - 250V AC 20A Plug              | <b>24-20P</b> - 347V AV 20A 3W/2P Plug NEMA 24-20 |
| <b>L5-15P</b> - 125V 15A Locking Plug           | <b>L6-20P</b> - 250V 20A Locking Plug        | <b>L24-20P</b> - 347V 20A Locking Plug            |
| <b>5-20P</b> - 125V AC 20A T-Slot Plug          | <b>7-15P</b> - 277V 15A 3W/2P NEMA 7-15 Plug | <b>24-15P</b> - 347V AC 15A 3W/2 Plug NEMA 24-15  |
| <b>L5-20P</b> - 125V 20A Locking Plug           | <b>L7-15P</b> - 277V 15A Locking Plug        |   |
| <b>6-15P</b> - 250V AC 15A 3W/2P Plug NEMA 6-15 | <b>7-20P</b> - 277V AC 20A Plug              |   |
| <b>L6-15P</b> - 250V 15A Locking Plug           | <b>L7-20P</b> - 277V 20A Locking Plug        |   |

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

Specifications subject to change without notice.

## Product Details

### Specifications

Efficacy: 2': Up to 181 Lm/W | 4': Up to 195 Lm/W  
 CRI: 83  
 Color Temperature: 3000K, 3500K, 4000K, 5000K  
 Lumen Maintenance: 200,000+ Life Hours (L70)  
 Voltage: 120/277V | 347/480V  
 Operating Temperature: -20°C to +55°C

### Controls

0-10 V Dimming

### Mounting

V Clips, Aircraft Cable

### Accessories

Occupancy Sensor (on/off)  
 Bi Level Dimming (100%/10%)  
 10kV Surge Protection  
 60 Deg Aisle Reflectors  
 Emergency Battery

## Output Performance


Model: Airflex 2	Watts	Lm/W	Lumens	Model: Airflex 4	Watts	Lm/W	Lumens
Airflex 2 80c	76	181	13,756	Airflex 4 80c	74	195	14,551
Airflex 2 95c	90.5	178	16,122	Airflex 4 110c	105	181	18,909
Airflex 2 110c	105	178	18,690	Airflex 4 135c	128	181	23,206
Airflex 2 135c	128	176	22,528	Airflex 4 160c	154	174	26,830
Airflex 2 160c	154	174	26,830	Airflex 4 190c	183	174	31,861
Airflex 2 190c	183	174	31,861	Airflex 4 240c	234	166	39,110
				Airflex 4 320c	315	164	51,473
				Airflex 4 400c	394	163	64,090
				Airflex 4 480c	473	162	76,705
				Airflex 4 600c	600	162	97,200

*Airflex 4 600c - not DLC Listed*


Specifications subject to change without notice.

## Dimensions


**Airflex 2**

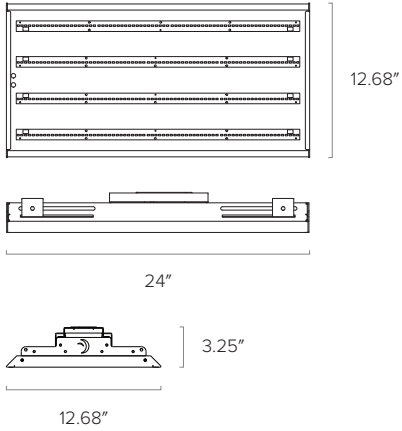


**Airflex 4**

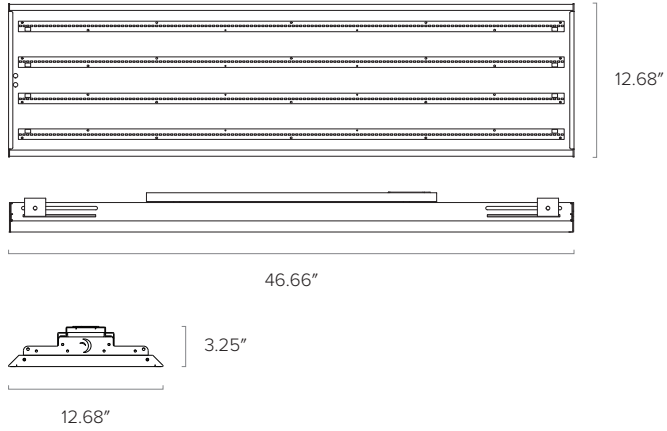

**Airflex 4 - 320W**

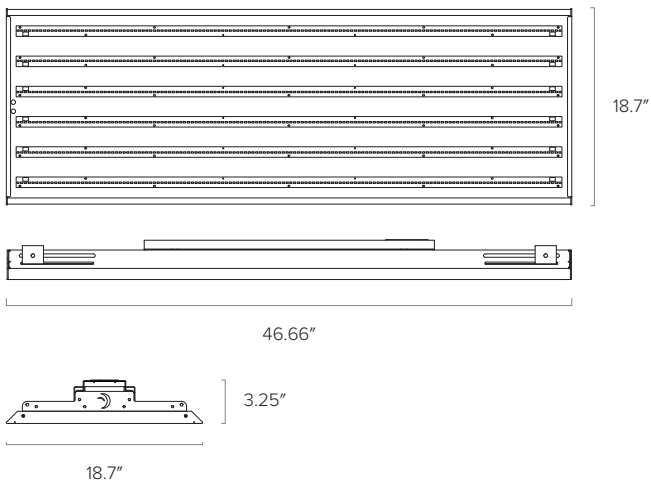

**Airflex 4 - 400W**

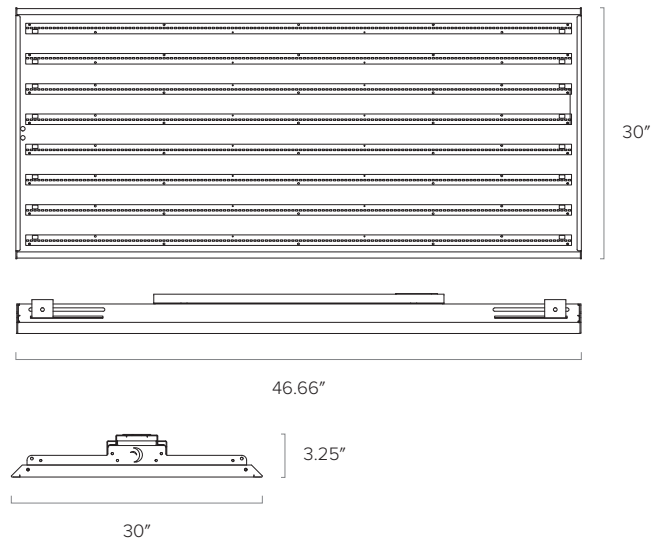

Specifications subject to change without notice.