



Date: _____ Fixture: _____

QTY: _____ Project: _____



Del Wrap

Surface Mount Wrap Around

LED wrap around fixture. Steel construction. Curved prismatic diffuser.

Low maintenance and easy installation. Minimal lamp image.

Designed and manufactured in North America.

cULus listed. 10 Year Warranty.

Output Performance

Model	Watts	Lm/W	Lumens
Del Wrap	20	152.6	3,052
	30	151.7	4,551
	40	150.7	6,028
	60	148.8	8,928

Ordering Options

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	WIDTH	MOUNTING
Del Wrap	20 30 40 60	3K 3000K 35K 3500K 4K 4000K 5K 5000K	U 120/277V H 347V	PR Prismatic Lens	WH White	10 10"	SU Surface

DEL WRAP				PR	WH	10	SU
----------	--	--	--	----	----	----	----

ACCESSORIES	PLUG OPTIONS
N None OCC Occupancy Sensor (on/off) 10kV 10kV Surge Protection	N None *See Plug Options

--	--

SAMPLE: DELWRAP - 20 - 4K - U - PR - WH - 7 - SU - N - N

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: Up to 153 Lm/W
Color Temperature: 3000K, 3500K, 4000K, 5000K
Lumen Maintenance: 100,000+ Life Hours (L70)
Voltage: 120/277V | 347V
Watts: 20W, 30W, 40W, 60W

Controls

0-10 V Dimming



Mounting

Surface Mounting

Accessories

Occupancy Sensor (waterproof option available)
Bi-Level Dimming (waterproof option available)
Photo Control
10kV Surge Protection

Dimensions

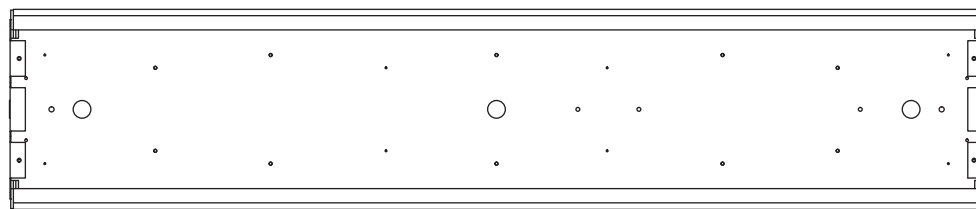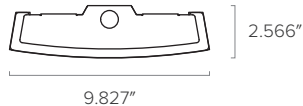

Specifications subject to change without notice.