

10 YR
WARRANTY



EMI Compliance:
FCC Part 15 Class A

Date: _____ Fixture: _____

QTY: _____ Project: _____



Airflex C

High Bay

Commercial and industrial LED high bay. Suspended mounting. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy Sensor, Bi-Level Dimming and 10kV Surge protection available options. Dry and damp rated. DLC and cULus listed. 10 Year Warranty.

Ordering Options

MODEL	LENGTH	WATTS: 2ft	WATTS: 4ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Airflex	2	80c	80c	3K 3000K	U 120/277V	NL No Lens (standard)	WH White	V V Clips
	4	95c	110c	35K 3500K	H 347/480V	FR Frosted		AC Aircraft Cable
		110c	135c	4K 4000K		CL Clear		
		135c	160c	5K 5000K				
		160c	190c					
		190c	240c					
		320c						
		400c						
		480c						
		600c						

AIRFLEX	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
---------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

WIRING	ACCESSORIES	REFLECTOR	AISLE OPTICS	PLUG OPTIONS
BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) BLD Bi-Level Dimming (100%/10%) 10kV 10kV Surge Protection EMBAT Emergency Battery	N None 60AF 60 Deg. Aisle Reflector	N None AISLE OPTICS	N None *See Plug Options

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------

SAMPLE: Airflex - 2- 80c - 4K - U - FR - WH - AC - BFC - N - N - N - N

PLUG OPTIONS

- | | | |
|---|--|---|
| 5-15P - 125V 15A T-Slot Plug | 6-20P - 250V AC 20A Plug | 24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20 |
| L5-15P - 125V 15A Locking Plug | L6-20P - 250V 20A Locking Plug | L24-20P - 347V 20A Locking Plug |
| 5-20P - 125V AC 20A T-Slot Plug | 7-15P - 277V 15A 3W/2P NEMA 7-15 Plug | 24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15 |
| L5-20P - 125V 20A Locking Plug | L7-15P - 277V 15A Locking Plug | |
| 6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15 | 7-20P - 277V AC 20A Plug | |
| L6-15P - 250V 15A Locking Plug | L7-20P - 277V 20A Locking Plug | |

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: 2': Up to 181 Lm/W | 4': Up to 195 Lm/W
 CRI: 83
 Color Temperature: 3000K, 3500K, 4000K, 5000K
 Lumen Maintenance: 200,000+ Life Hours (L70)
 Voltage: 120/277V | 347/480V
 Operating Temperature: -20°C to +55°C

Controls

0-10 V Dimming

Mounting

V Clips, Aircraft Cable

Accessories

Occupancy Sensor (on/off)
 Bi Level Dimming (100%/10%)
 10kV Surge Protection
 60 Deg Aisle Reflectors
 Emergency Battery

Output Performance


Model: Airflex 2	Watts	Lm/W	Lumens	Model: Airflex 4	Watts	Lm/W	Lumens
Airflex 2 80c	76	181	13,756	Airflex 4 80c	74	195	14,551
Airflex 2 95c	90.5	178	16,122	Airflex 4 110c	105	181	18,909
Airflex 2 110c	105	178	18,690	Airflex 4 135c	128	181	23,206
Airflex 2 135c	128	176	22,528	Airflex 4 160c	154	174	26,830
Airflex 2 160c	154	174	26,830	Airflex 4 190c	183	174	31,861
Airflex 2 190c	183	174	31,861	Airflex 4 240c	234	166	39,110
				Airflex 4 320c	315	164	51,473
				Airflex 4 400c	394	163	64,090
				Airflex 4 480c	473	162	76,705
				Airflex 4 600c	600	162	97,200

Airflex 4 600c - not DLC Listed


Specifications subject to change without notice.

Dimensions


Airflex 2

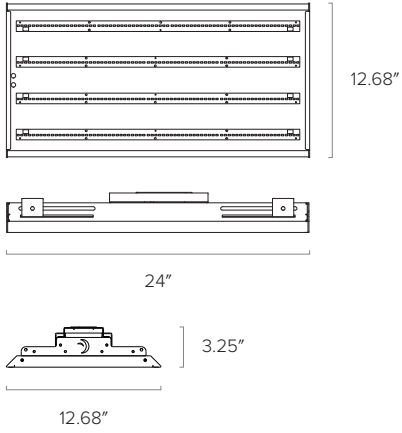


Airflex 4

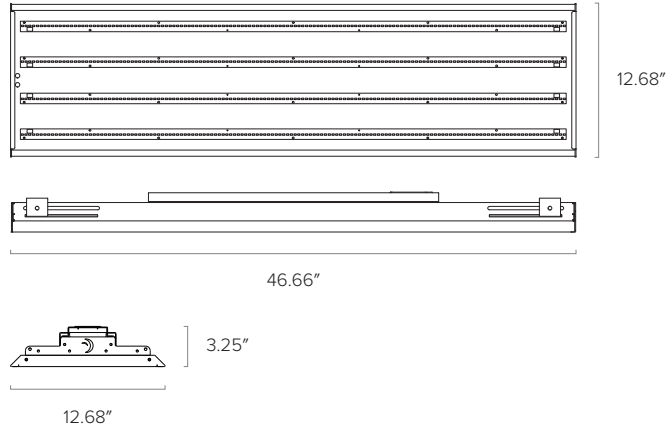

Airflex 4 - 320W

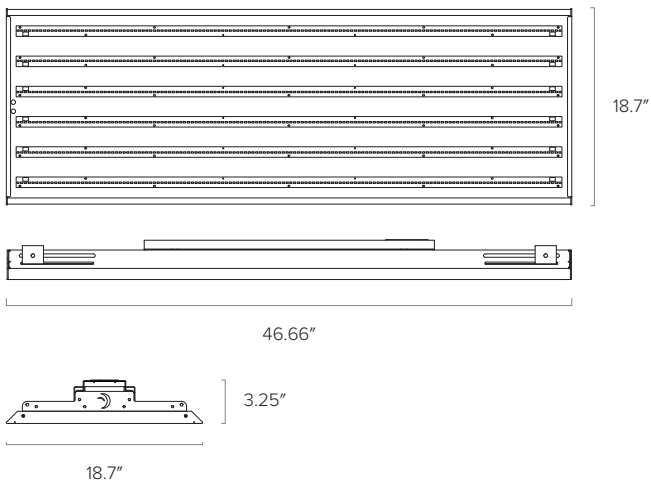

Airflex 4 - 400W

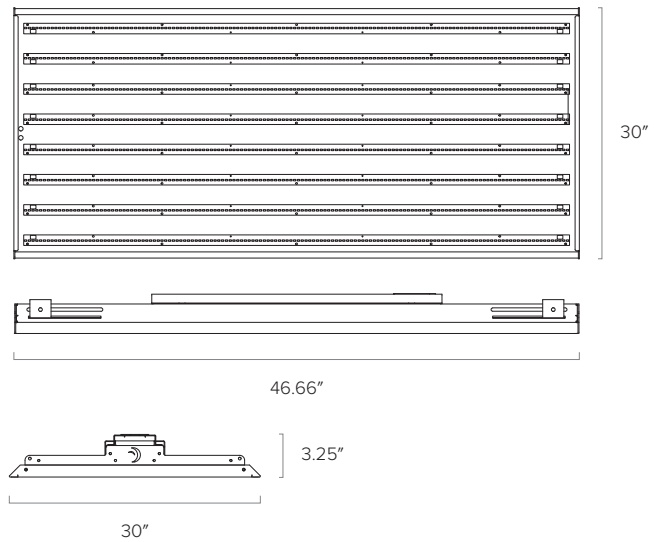

Specifications subject to change without notice.