

DATE:	CLIENT:	FIXTURE:	QUANTITY:
-------	---------	----------	-----------

TITAN HB 80

LED High Bay with Recessed Kit

Industrial / Commercial / Warehouse / Large Box Retailers



FEATURES / SPECIFICATIONS

Fixture

- Aluminum construction
- Polycarbonate protective lens

Color Rendering Index

- 86

Lumen Maintenance

- 200,000+ Life Hours (L70)

Efficacy

- 117.9 lm/w

Wattages

- 80

Color Temperature

- 3000K
- 3500K
- 4000K
- 5000K

Voltage

- 120/277V
- 347/480V

Operating Temperature

- -40°C to +40°C

Controls

- 0-10V Dimming
- WIFI Dimmable
- Occupancy Sensor

Mounting

- Recessed


Certifications

- DLC
- cULus

PERFORMANCE

MODELS	Input Watts	Lm/W	Delivered Lumens
TITANHB 80	81.5	117.9	9,609

DIMENSIONS

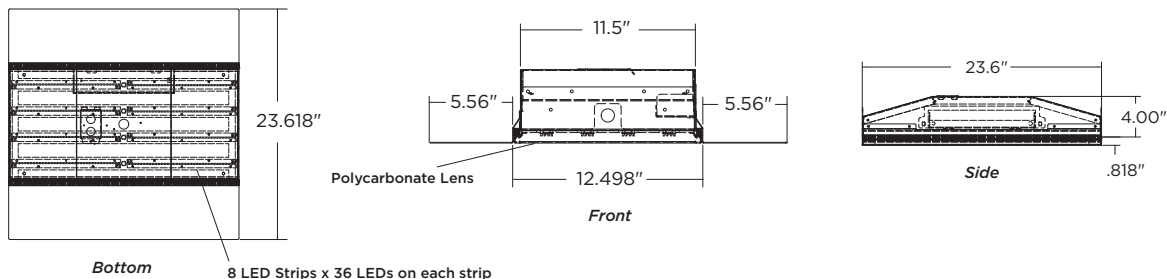

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

10 Year
Warranty

1

ORDERING OPTIONS

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING	WIRING
TitanHB	80	3K 3000K	U 120/277V	FR Frosted	WH White	TG T Grid	BFC Black Flexible Cord
		35K 3500K	H 347/480V	CL Clear	CU Custom	WFC White Flexible Cord	
		4K 4000K		CLG Clear Glass			
		5K 5000K					

ACCESSORIES	TYPE	PLUG
N None	RC Recessed	N None
OCC Occupancy Sensor (on/off)		* See Plug Options
WC Wireless Controls*		
BLD Bi Level Dimming (100%/10%)		
GCC Gasketed and Conformal Coated		
DA Dimming Wire Accessible		
10kV 10kV Surge Protection		

NOTE:

TitanHB Natatorium - includes conformal coated boards and gasketing for damp and chlorine rated environments.

WC - Please consult factory

TITANHB	80					TG			R	
MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING	WIRING	ACCESSORIES	TYPE	PLUG

*** PLUG OPTIONS**

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15